

# DEVELOPMENT OF EARTHQUAKE AND TSUNAMI DISASTER MITIGATION PLAN FOR MANDALIKA MOTOGP CIRCUIT IN LOMBOK

*by* Dwi Dinariana

---

**Submission date:** 14-Mar-2024 08:59AM (UTC+0700)

**Submission ID:** 2319905208

**File name:** aster\_Mitigation\_Plan\_For\_Mandalika\_Motogp\_Circuit\_In\_Lombok.pdf (1.41M)

**Word count:** 3991

**Character count:** 21129

## DEVELOPMENT OF EARTHQUAKE AND TSUNAMI DISASTER MITIGATION PLAN FOR MANDALIKA MOTO GP CIRCUIT IN LOMBOK

R. Baheramsjah<sup>(1)</sup>, A.M. Mansoer<sup>(2)</sup>, H. Harinto<sup>(3)</sup>, H. N. Nurjaman<sup>(3)</sup>, M. Irsyam<sup>(4)</sup>, M. Asrurifak<sup>(4)</sup>, M. Ridwan<sup>(4)</sup>, L. Faizal<sup>(4)</sup>, H. Latief<sup>(4)</sup>, B. Hariandja<sup>(5)</sup>, Suwito<sup>(6)</sup>, D. Dinariana<sup>(7)</sup>

<sup>(1)</sup> Chief Executive Officer, Mandalika Grand Prix Association, Indonesia, [ricky.baheramsjah@themandalika gp.com](mailto:ricky.baheramsjah@themandalika gp.com)

<sup>(2)</sup> President Director, Indonesian Tourism Development Corporation, Indonesia, [info@itdc.co.id](mailto:info@itdc.co.id)

<sup>(3)</sup> Steering Committee, Indonesian Tourism Development Corporation, Indonesia, [info@itdc.co.id](mailto:info@itdc.co.id)

<sup>(4)</sup> National Centre of Earthquake Studies, Research Institute of Housing and Human Settlement, Ministry of Public Work and Housing, Indonesia, [info@puskim.pu.go.id](mailto:info@puskim.pu.go.id)

<sup>(5)</sup> Emeritus Professor, Civil Engineering Department, Institut Teknologi Bandung, Indonesia, [binsar\\_hariandja@ymail.com](mailto:binsar_hariandja@ymail.com)

<sup>(6)</sup> Assistant Professor, Construction Engineering and Management Department, Universitas Agung Podomoro, Indonesia, [suwito@podomorouniversity.ac.id](mailto:suwito@podomorouniversity.ac.id)

<sup>(7)</sup> Associate Professor, Civil Engineering Department, Universitas Persada Indonesia, Indonesia, [dwidinariana@gmail.com](mailto:dwidinariana@gmail.com)

### Abstract

Indonesia has begun the construction of new Moto GP circuit in Mandalika region, Lombok, West Nusa Tenggara. The Mandalika circuit will be the only street circuit of Moto GP and will start hosting Moto GP races in 2021. The circuit is located in a scenic Indian Ocean beach resort area in Lombok. Considering that Lombok is situated near earthquake sources in the form of the sub-duction due to convergence of two major tectonic plates of Indo-Australia and Eurasia, and several active faults in the island and ocean, the earthquake and tsunami mitigation plan of circuit infrastructures and facilities needs to be handled. Even though racing event is not a daily activity, the management wants the circuit arena to be also used as pilot project for natural disaster mitigation that is combined with educational tourism. As part of mitigation plan, seismic micro-zonation was specially conducted for the site so as to get more accurate earthquake load to be used in the design of buildings and infrastructures in and around the circuit. In addition, the latest earthquake resistant building technologies were incorporated into the design. Tsunami simulation was conducted based on earthquake sources potential of subduction in Indian Ocean that was propagated to Mandalika beach and then employed to develop mitigation plan in Mandalika circuit area. Mitigation plan in the forms of evacuation area plan, evacuation route plan, and evacuation protocol plan was designed as tourist attraction. The overall earthquake and tsunami mitigation plan will be packaged as educational tourism so that it can change the people's view on that natural phenomenon from threat to business potential.

*Keywords: earthquake; tsunami; sub-duction; Mandalika; Moto GP*



## 1. Introduction

Mandalika, located in a scenic Indian Ocean beach resort area in Lombok Island, West Nusa Tenggara Province, is one of new tourist destinations in Indonesia. As such, Indonesian Government wants to maximize Mandalika's potential as a tourist attraction. One of the efforts by government is to build Mandalika MotoGP circuit and host the event of MotoGP race starting on 2021. Mandalika MotoGP circuit will be the only street circuit in MotoGP series. Figs 1(a) and 1(b) show map and construction progress of Mandalika MotoGP circuit. The event is expected to boost tourism industry in the surrounding areas. The economy, employment opportunities and the utilization of natural resources are expected to improve.



Fig. 1– (a) Map of Mandalika MotoGP circuit, Lombok, (b) Construction progress of Mandalika Moto GP circuit, Lombok

In developing Mandalika tourism area, a sustainable development strategy taking into account the environment and natural disaster risk, is employed. This strategy is carried out so that the buildings and infrastructures constructed in the area do not impact the environment negatively and are able to withstand any anticipated natural disaster. This study mainly focuses on the disaster mitigation plan against earthquake and tsunami.

Geographically, Mandalika is located near the coastline and at the sub-duction zones due to convergence of two major tectonic plates of Indo-Australian and Eurasia plates and resulted in the formation of the Sunda and Banda island arcs. Thus, the region is prone to earthquake and tsunami threats. Any buildings and infrastructures built in the region must be designed against earthquake and tsunami. In addition, for the safety of population in the region, tsunami disaster management plan must be prepared and implemented.

## 2. Earthquake and Tsunami Hazard

Earthquake and tsunami have been identified as two forms of natural disasters that threat Mandalika resort area. As such, they both will be described herein.

### 2.1 Earthquake

Indonesian archipelago is located on subduction zones of three main active tectonic plates, namely the Eurasian Plate, Pacific Plate, and Indo-Australian Plate as shown in Fig. 2(a). Indo-Australian plate moves to the north direction with the rate of 50-70 mm per year and slides down below deep sea bed of Sumatra, Java and Timor (at East Nusa Tenggara) islands. As a result, and due active movement of the plates, the country is frequently struck by major earthquakes. The major earthquakes normally occur at the areas near the boundaries among the 3 plates and along the lines of active faults formed at the plate interior part of Indonesian archipelago as shown in Fig. 2(b). Sub-duction zones located in south of Lombok island as well as active faults located in Lombok and Bali islands contribute to the level of earthquake hazard in Mandalika resort area, Lombok.

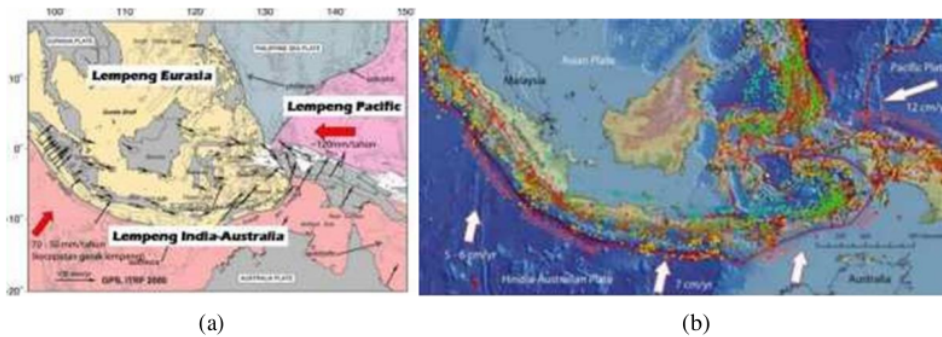


Fig. 2 – (a) Map of Indonesia active tectonic plates and (b) Map of Indonesia active tectonic plates and earthquake records since 1973 [7]

Since the Mandalika area is located in a high-risk seismic zone, the impact of earthquake needs to be taken into consideration when designing buildings and infrastructures in the area. In general, earthquake can result in disaster due to soil deformation along seismic fault and, depending the magnitude of the earthquake, the seismic ground motion can spread to the surrounding areas with radius up to hundred kilometers. In addition, seismic shock wave can cause further disaster in the forms of soil sliding and settlement. And if the earthquake source is located beneath the ocean, the seabed movement can trigger tsunami.

To determine the level of seismic hazard of a region in relation to structural design of building, a parameter, named Peak Ground Acceleration (PGA) is normally used. Seismic ground motion analysis is carried out using method called Probabilistic Seismic Hazard Assessment (PSHA). In this study, the required parameters for earthquake hazard analysis are adopted from Indonesian Seismic Hazard Map 2010 (published by Ministry of Public Work and Housing), a part of design code used for designing earthquake resistant structures.

For designing a structure in a region, designed lateral base shear force due to seismic ground motion must be determined based on requirements set by government body in Indonesian National Standards (SNI). The design standard provides guidelines to design earthquake resistant structures that are able to prevent loss of life and global collapse. According to SNI 1726:2002, seismic design load is determined based on the return period of 475 years, or has 10% probability of exceedance in 50 years. Maps of PGA developed by the Ministry of Public Work and Housing using either probabilistic or deterministic method are presented both in 10% and 2% of probability of exceedance in 50 years as shown in Figs 3(a) and 3(b), respectively.

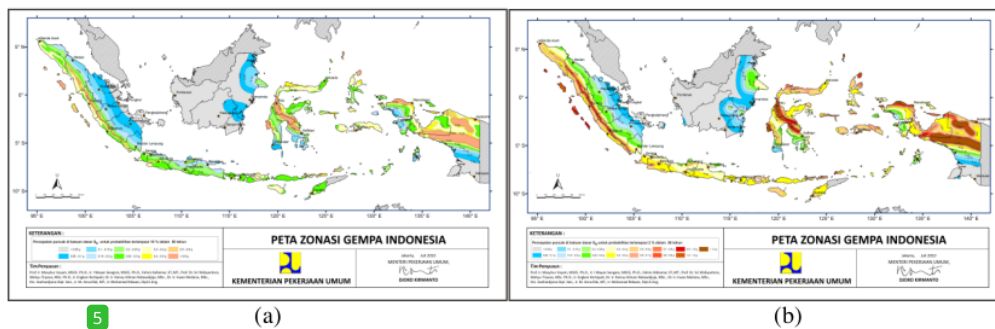


Fig. 3 – Peak Ground Acceleration (PGA) seismic hazard map at bedrock ( $S_B$ ) for (a) 10% probability of exceedance in 50 years, (b) 2% probability of exceedance in 50 years



Based on the result of PSHA above, it is found that Mandalika resort region has a quite high PGA at bedrock of 0.250 g for 10% probability of exceedance in 50 years (return period of 475 years) and of 0.375 g for 2% probability of exceedance in 50 years (return period of 475 years) as summarized in Table 1.

Table 1 – Hazard level of coast line towns against earthquake

Location			Order	Coordinate		PGA		Hazard Level
Name	District	Province		Latitude	Longitude	10% PE50	2% PE50	
Selong	Lombok Timur	NTB	2	116.538	-8.652	0.150	0.225	HIGH
Mataram	Mataram Town	NTB	1	116.139	-8.583	0.250	0.375	HIGH

## 2.2 Tsunami

The word tsunami has the origin from Japanese language and consists of two syllables, “tsu” meaning wave and “nami” meaning harbour, and thus has the overall meaning of harbor wave. Tsunami is normally triggered by sudden change of large volume of water in the ocean or lake caused by natural disasters. One of natural disasters that often causes tsunami is an earthquake.

The two recent large tsunamis that are caused by the earthquake are 2011 Tohoku Tsunami, Japan and 2004 Aceh Tsunami, Indonesia. These two tsunamis and also other large tsunamis in the past had a very devastating impact to man-made environment and lives. The destruction caused by tsunami’s massive flooding to the coastal area include:

- i. Destroy wooden houses except their foundations.
- ii. Destroy non-structural elements of houses and buildings made of reinforced concrete and steel structures. The structural elements are normally still intact.
- iii. The destruction force of tsunami increases with the increased amount of rubbles (from destroyed buildings, vehicles, ships, etc.) floating in tsunami wave
- iv. Broken-down of reinforced concrete wall due huge horizontal force coming from tsunami current, lifted building floor due buoyancy force of water or trapped water
- v. Rolled building because lifted pile foundation due to loss of friction resistance of sandy soil because of liquefaction.
- vi. Secondary effects such as fire and explosion of power plants

Distribution of wave height along the coastal line at Mandalika Moto GP circuit region and its surrounding area (KMPL), as shown in Fig. 4, are between 5 meters and 10 meters for return period of 500 years while energy distribution and Estimated Tsunami Arrival (ETA) of 38 minutes at KMPL is shown in Fig. 5.

Based on the result from DTHA, the city of Denpasar has maximum tsunami amplitude of 9.3 m with ETA of 38 minutes, while the city of Mataram of 6.3 m and ETA of 28 minutes as summarized in Table 2. Considering that position of city of Denpasar is relatively the same to Mandalika Moto GP circuit region in term of position from sub-duction zones in the south of Bali and Lombok Islands, thus the maximum tsunami amplitude of about 10 m with ETA of 38 min. can be taken.

Table 2 – Tsunami hazard level for coastal line cities in Bali and Lombok

Location			Order	Coordinate		H MAX (m)	T MAX (min.)	Hazard Level
Name	District	Province		Latitude	Longitude			
Selong	East Lombok	NTB	2	116.538	-8.652	6.6	20	HIGH
Mataram	City of Mataram	NTB	1	116.139	-8.583	6.3	27	HIGH

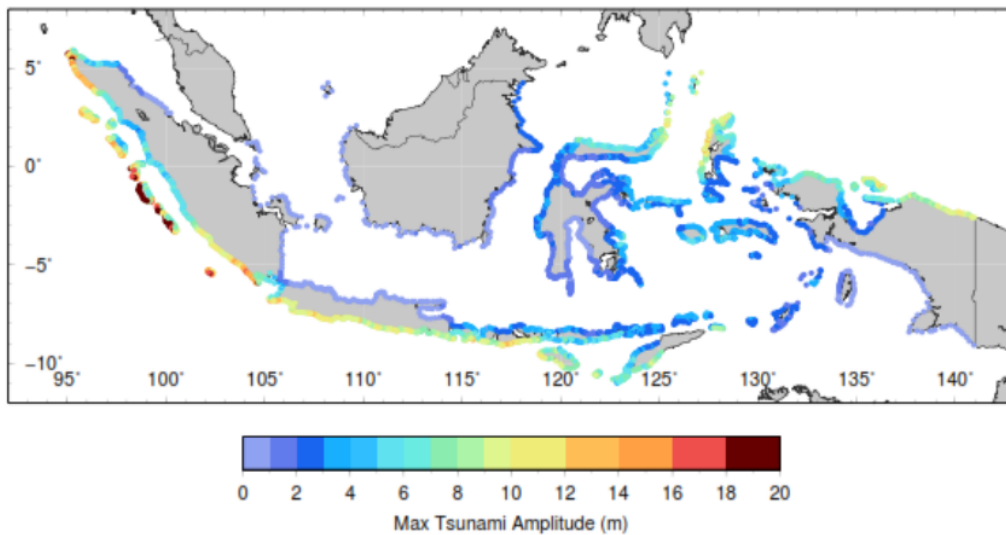


Fig. 4 – Tsunami hazard map of maximum tsunami amplitude (m) at Coastal line with return period of 500 years [7]

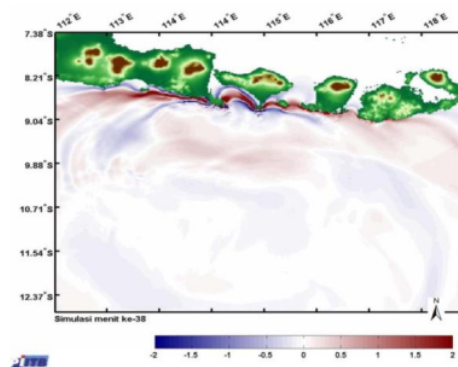


Fig. 5 – Distribution of tsunami amplitude and ETA at KMPL [7]

Based on the history of Banyuwangi Tsunami 1994 run-up with maximum tsunami amplitude of 13.9 and average amplitude of 5-8 m at Pancer bay, and of Pangandaran Tsunami 2006 with maximum tsunami amplitude of 17 meter and average amplitude of 5-8 m at Nusa Kambangan Island, the maximum tsunami amplitude at Mandalika Moto GP circuit can reach 15 m inside the bay with average amplitude of 5-10 m along KMPL with ETA of 38 minutes.

### 3. Implementation of Tsunami Mitigation System

Based on assessment of tsunami hazard and risk and several guidance [1-3] and previous studies [4-8], several tsunami mitigation measures have been implemented in the forms of structural and non-structural measures. The physical measures that have been implemented include:



- a) Constructions of coastline protection system (breakwater, seawall, river gate),
- b) Plantation of mangrove forest, and
- c) Taking care of sand dune and coral reefs.

On the other hand, the non-structural measures include:

- a) Tsunami hazard assessment,
- b) Real time monitoring of tsunami early warning system,
- c) Tsunami friendly spatial planning,
- d) Improving building code,
- e) Educating local population about tsunami awareness, preparedness including tsunami drill, and
- f) Building TES and evacuation signs

### 3. Design Tsunami Temporary Evacuation Shelter (TES)

Tsunami evacuation shelter is designed based on earthquake and tsunami probability maps. For Mandalika circuit Moto GP area, the following data are used:

- Tsunami height at coastal line is 15 meters
- Estimated Tsunami Arrival (ETA) is 40 minutes

These data are used to design some facilities as part of tsunami mitigation system.

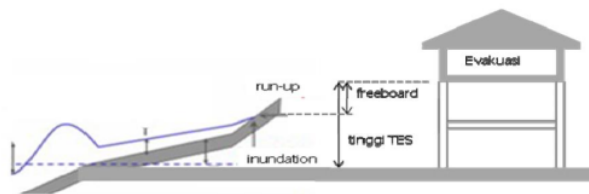


Fig. 6 – TES height

#### 3.1 Evaluation of TES height

TES height, as illustrated in Fig. 6, can be determined using Eq. (1) below:

$$H = H_i + H_f \quad (1)$$

where

$H$  = TES height from the ground surface (m),

$H_i$  = Inundation height of tsunami wave (m) and

$H_f$  = freeboard height (3 m + 30%  $H_i$ ).

For example, if design parameter for the tsunami height is 10 m, then the TES is  $H = 10 + (3 + 0.3 \times 10) = 16$  m.

#### 3.2 Evacuation Time

Time needed by tourists and local people in Mandalika and its surrounding area to evacuate can be determined by considering the following factors:

- a) Estimated Tsunami Arrival, ETA, and
- b) Time for Early Warning, TEW.

The critical time to evacuate safely before tsunami arrival can then be evaluated using Eq. (2). Critical time (ETE, Evacuation Time Estimate) is time difference between ETA and TEW.



$$ETE \geq ETA - TEW \tag{2}$$

When an earthquake takes place, the estimated time to prepare tsunami early warning time,  $T_0$ , for Mandalika resort area is about 5 minutes or less ( $I_{na}$  TEWS, BMKG, 2012. Estimated time required to spread the news from local government to people in the impacted area is about 5 minutes ( $T_1$ ). Reaction time for people to prepare evacuation is about 5 minutes ( $T_2$ ). Thus,  $T_{EW} = T_0 + T_1 + T_2 = 15$  minutes. Taken  $ETA = 40$  minutes, then  $ETE = ETA - TEW = 25$  minutes.

### 3.3 Location of TWE and TEA Tsunami

For designing the location of TES and TEA, it is necessary to consider the longest distance that can be reached by weak people with physical limitation. There are two methods that can be used to determine optimum distance and location as follows:

- a) Empirical calculation developed by FEMA
- b) Calculation based on physical field condition

Table 2 presents calculation location distance radius of TES and TEA using field condition calculation method.

Table 3 – Calculation distance radius TES at Mandalika Moto GP circuit region

Effective Evacuation Time (ETE)	Walk Speed of people (Weak)	Travel Distance to TES	Maximum Distance between 2 TES Locations
25 minutes	2 mph ( 3.22 km/hour )	1.34 km	2.68 km

From radius distance calculation, the minimum numbers of TES can be determined. Eleven TES locations are selected over Mandalika Moto GP circuit region as shown in Fig. 7. Distance between TES is adjusted based on other factors to improve TES effectiveness as explained in Figs 8 (a) and 8 (b).

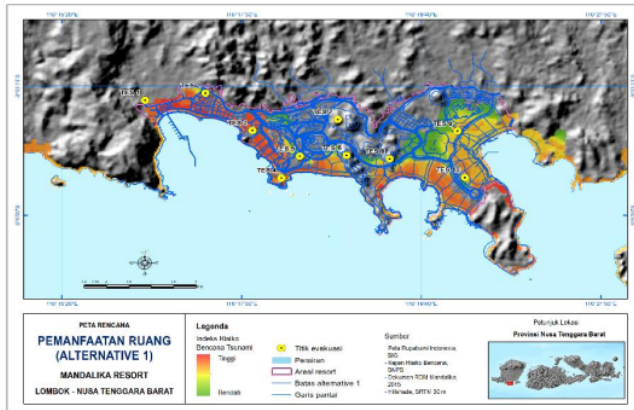


Fig. 7 – Distribution of planned TES locations in Mandalika resort region

In determining distribution of TES locations, simulation of tsunami propagation and water coverage modeling must be performed. In addition, tsunami hazard assessment takes into account vulnerability built up at Mandalika resort region. With this hazard analysis, it can be determined the evacuation route and the minimum width of footpath that can be used to evacuate mass population from danger tsunami region.



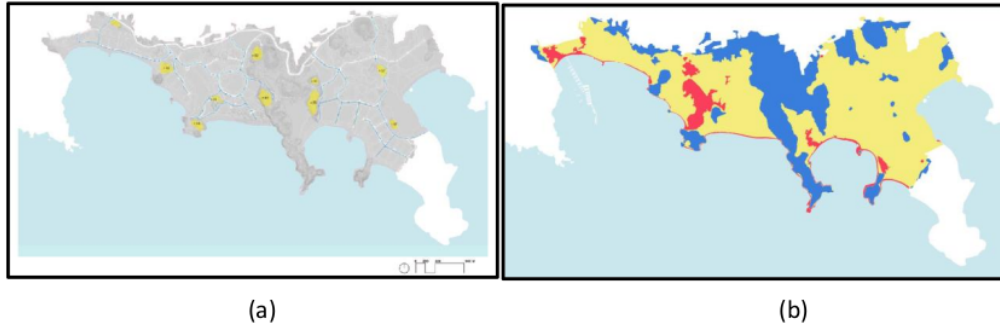


Fig. 8 – (a) Topography map of TES locations at Mandalika resort region, (b) Distribution map of tsunami flooded area and depth in Mandalika resort region [7]

From Fig. 8 (a) one can see that the land topography in Mandalika resort region has natural hills near the coastal area. It is also known that selecting evacuation place at higher ground is important aspect that must be taken into account. Therefore, higher grounds or hills are selected to be the 11 TES locations covering all areas in Mandalika resort region. Meanwhile, flooded area and depth due to tsunami wave can be seen in Fig. 8 (b) and are influenced by land topography in Mandalika Moto GP circuit region. It can be seen that area along coastal line and around downstream of Batang River will be the areas that flooded deepest.

### 3.4 Calculation the Area of TES

International standard for required area per person for tsunami evacuation is still not available. Therefore, in designing building capacity for TES, one can consider the requirement for comparable natural disaster such as international standard for tornado disaster evacuee (International Code Council/National Storm Shelter Association) that has almost similar requirement characteristics for short term period at the time of disaster or for long term period after disaster (FEMA P-464, 2012). Considering that tsunami is temporary building for emergency situation, and there is still no specific standard of requirement area per person for TES, then, for this study, we adopt emergency situation due to tornado published by FEMA P-646, 2012 (Table 4).

Table 4 – Recommendation space area per person inside TES facility

Temporary Evacuation Situation In Hours (Max. 24 hours)	Room Standard per Person (m <sup>2</sup> )
Standing or Sitting	0.5
Wheelchairs	1
With Bed Care	2.8
Evacuation Situation Have To Stay In Days	Room Standard per Person (m <sup>2</sup> )
Staying In Short Term (Couple Of Days)	2
Staying In Long Term (Couple Of Weeks)	3.7

From Table 4, standard space of TES is (0.5-1) m<sup>2</sup>/person, in which 1 m<sup>2</sup>/person for comfortable condition while 0.5 m<sup>2</sup>/person for standing condition. Calculation of minimum area for each TES and TEA is carried out with consideration of the numbers of evacuee, evacuation duration and standard space requirement.



Table 4 – Proposed location and name of TES and TEA

No	Location	Name	Minimum Area of TES (m <sup>2</sup> )	Notes
TES 1 / F	West Zone	The Breeze Kuta	3962	
TES 2 / D	West Zone	The Breeze Seger	3453	
TES 3 / B	West Zone	The Lagoon	6421	
TES 4 / A	West Zone	The Serenity	1793	
TES 5 / C	West Zone	The Scenery	1560	
TES 6 / H	Middle Zone	The Hills 1	1840	
TES 7 / G	Middle Zone	The Hills 2	2186	
TES 8 / J	East Zone	The Rainbow	5325	
TES 9 / I	East Zone	The Sanctuary	6602	
TES 10 / E	Middle Zone	The West Circle Hub	3055	TES and TEA
TES 11 / K	East Zone	The East Circle Hub	4649	TES and TEA

### 3.5 Design of TES

TES built for Mandalika Moto GP circuit region is also intended as tourist attraction that take advantage of beautiful scenery and interesting culture in Lombok. As such, prize contest to design architectural concept for TES facility for Mandalika Moto GP circuit region was held.



Fig. 9 – Location of TES B in Mandalika MotoGP circuit region and Evacuation Routes

The TES location is selected for the contest is at TES B (shown in Fig. 9), which has hilly topography contour and protrudes to the sea. This becomes the main parameter in the design because from tourism perspective the location is close to the sea and has beautiful scenery. The winner of contest is shown in Fig. 10. In addition, evacuation path to TES B located on top of the hill must be designed in detail so that it will be easy to be accessed whether there is disaster or not.



Figure 10 – The Winner Of Architectural Contest For TES Design

The theme of TES building architecture concept was named ‘Nibing Sasak’, which means to be protected in one. That is reflecting the function of Temporary Evacuation Shelter (TES). The iconic shape of its rooftop reflecting the importance of ‘Bale Lumbung’ (Rice Storage Building) for the people of Lombok.



Fig. 11 – Front view of TES buildings

In addition to its function as temporary evacuation place, TES is also designed to have restaurant and viewing station as new tourism objects. Clinics and rest rooms, as shown in Fig. 11, are also provided to support evacuee that have to stay a long period of time in TES during tsunami disaster.

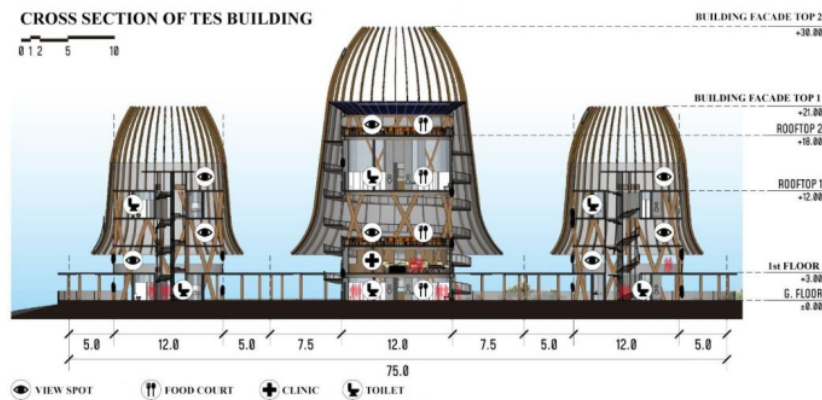


Fig. 12 – Sections of TES buildings



### 3. Conclusions

Mandalika Moto GP circuit region is located in high level of earthquake and tsunami hazard area. As such the development of the area must be planned and designed against earthquake and tsunami.

Buildings and infrastructures in the areas must be designed to be earthquake resistant by adhering to structural and seismic design code applicable in Indonesia. In relation to tsunami, mitigation system has been developed to minimize the impact of tsunami disaster. Included in tsunami mitigation plan are:

- a) Develop building code requirements that implement natural disaster mitigation plan.
- b) Design evacuation path, muster point, TES.
- c) Implement coastal line protection along 100 m or adjusted with tsunami hazard level at that location.
- d) Community preparedness program against natural disasters.

Finally, in addition to its main purpose, mitigation plan for natural disaster management is also designed as a tourist attraction and a natural disaster education. The facilities built for mitigation plan is specifically planned and designed to fulfill those intended purposes.

### 4. Acknowledgements

The Financial support provided by Indonesia Tourism Development Corporation (ITDC) for this research is highly appreciated.

### 6. References

- [1] Pusat Penelitian Mitigasi Bencana, (2013): Pedoman Teknik Perancangan Struktur Bangunan, Tempat evakuasi Sementara Tsunami, ITB, Bandung.
- [2] Badan Meteorologi Klimatologi dan Geofisika, Jakarta (2012): Buku utama Standard Operating Procedure (SOP) Indonesia Twunami Early Warning System.
- [3] Federal Emergency Management Agency (2008): Guidelines for Design of Structures for Vertical Evacuation from Tsunamis. California: FEMA.
- [4] Latief H (2000): Study on the Mangrove control forest to reduce tsunami impact. *Proceedings of 12th Congress of the IAHR-APD*, Bangkok.
- [5] Sudiarta G, Santoso K (2011): Rekomendasi Pengembangan Sistem Peringatan Dini Tsunami di Lombok Nusa Tenggara Barat. Mataram: BPBD-NTB.
- [6] Mawardi A (2018): Review Study on Location Plan of Temporary Shelter for Tsunami Disaster in Kuta Bay of Central Lombok. *Journal of the Civil Engineering Forum*, 4(3), 233-242.
- [7] Latief H (2000): Tsunami Catalog and Zoning in Indonesia. *Journal of Natural Disaster*, Japan.
- [8] Indonesian-German Working Group on Tsunami (2011): Guideline for tsunami risk assessment in Indonesia, scientific proposal for practitioner and end users.

# DEVELOPMENT OF EARTHQUAKE AND TSUNAMI DISASTER MITIGATION PLAN FOR MANDALIKA MOTOGP CIRCUIT IN LOMBOK

## ORIGINALITY REPORT

13%

SIMILARITY INDEX

11%

INTERNET SOURCES

11%

PUBLICATIONS

8%

STUDENT PAPERS

## PRIMARY SOURCES

1	<a href="http://wcee.nicee.org">wcee.nicee.org</a> Internet Source	6%
2	Md. Main Uddin, S. M. Nawshad Hossain, Tanzila Aktar Shawon, Ashraf Uddin Fahim, Sabrina Sharmin, Mohammad Mizanur Rahman. "ADDRESSING THE FIRE SAFETY PROBLEMS IN SHOPPING CENTRES OF DHAKA CITY: A CASE STUDY ON SOME SELECTED SHOPPING CENTRES IN MIRPUR AREA", International Journal of Engineering Science Technologies, 2023 Publication	2%
3	<a href="http://eudl.eu">eudl.eu</a> Internet Source	1%
4	Submitted to Indian Institute of Technology Roorkee Student Paper	1%
5	<a href="http://nhess.copernicus.org">nhess.copernicus.org</a> Internet Source	1%

6	<a href="https://discovery.ucl.ac.uk">discovery.ucl.ac.uk</a> Internet Source	1 %
7	Submitted to Universität Potsdam Student Paper	1 %
8	<a href="https://etheses.whiterose.ac.uk">etheses.whiterose.ac.uk</a> Internet Source	<1 %
9	Kyriazis Pitilakis, Sotiris Argyroudis. "Chapter 395 Earthquake Risk Mitigation of Lifelines and Critical Facilities", Springer Science and Business Media LLC, 2015 Publication	<1 %
10	Masyhur Irsyam, Phil R Cummins, M Asrurifak, Lutfi Faizal et al. "Development of the 2017 national seismic hazard maps of Indonesia", Earthquake Spectra, 2020 Publication	<1 %
11	Thapa Dilli Ram, Guoxin Wang. "Probabilistic seismic hazard analysis in Nepal", Earthquake Engineering and Engineering Vibration, 2013 Publication	<1 %
12	<a href="https://vdocuments.mx">vdocuments.mx</a> Internet Source	<1 %
13	Arianna Guardiola-Víllora, Sergio Molina, Dina D'Ayala. "Performance based probabilistic seismic risk assessment for urban heritage.	<1 %

An example in Pla del Remei Area (Valencia)",  
Bulletin of Earthquake Engineering, 2023

Publication

---

14

Hari Nugraha Nurjaman, Suwito, Christ  
Robert Marbun, Irawanto, Martinus Nifotuhu  
Fau. "Structural assessment of rental housing  
flat Lere in Palu affected by Palu earthquake  
on September 28, 2018", AIP Publishing, 2020

Publication

---

<1 %

---

Exclude quotes      Off

Exclude matches      Off

Exclude bibliography      On